




LINCS BUILDING
CONSULTANCY

Guidance Note No. 10

Part M – Dwellings

- ❖ Circulation within the Entrance Storey
- ❖ Accessible Switches and Socket Outlets


Circulation within the Entrance Storey of a Dwelling

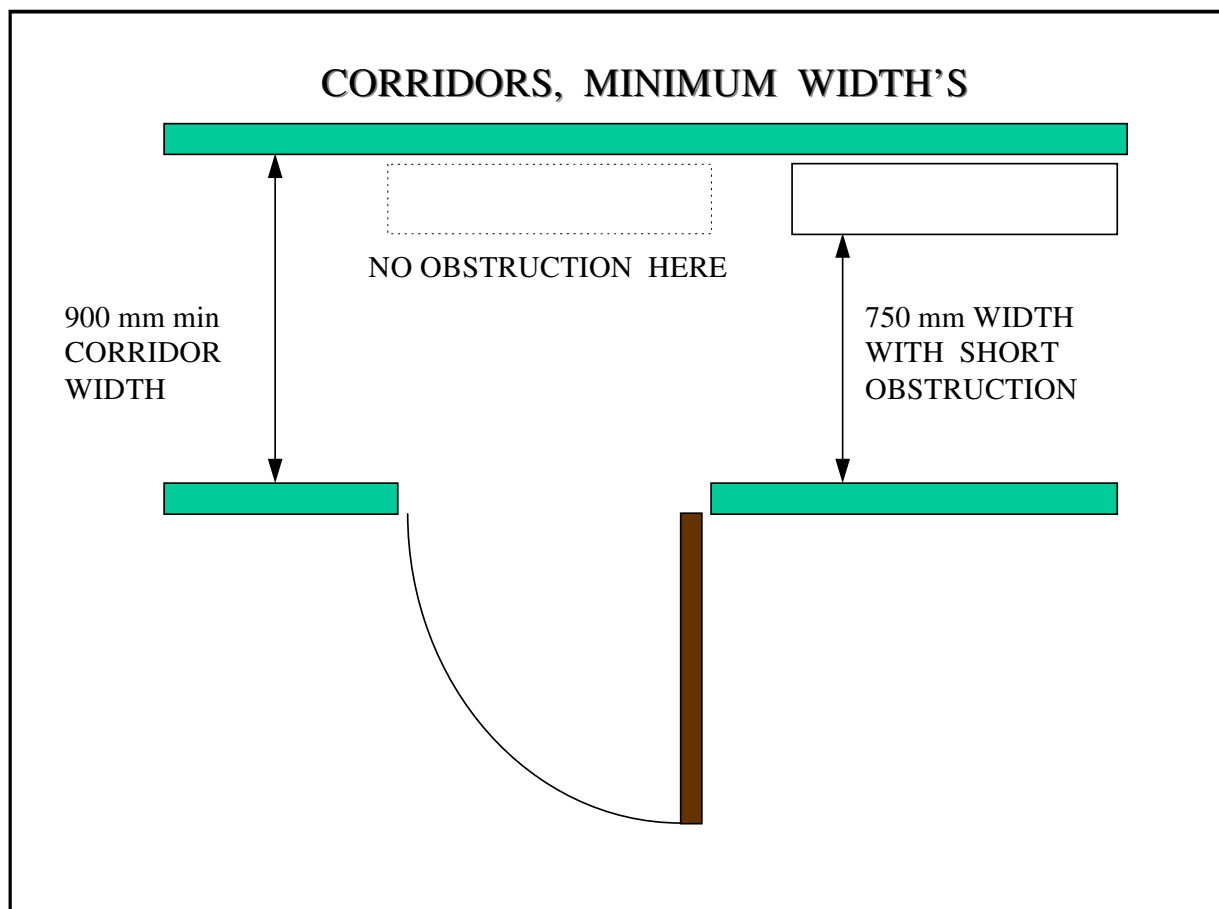

Minimum widths of corridors and passageways for a range of door widths

Doorway Clear Opening Width (mm)	Corridor/Passageway Width (mm)
750 or wider	900 (when approached head-on)
750	1200 (when approached not head-on)
775	1050 (when approached not head-on)
800	900 (when approached not head-on)

Accessible Switches and Socket Outlets in a Dwelling

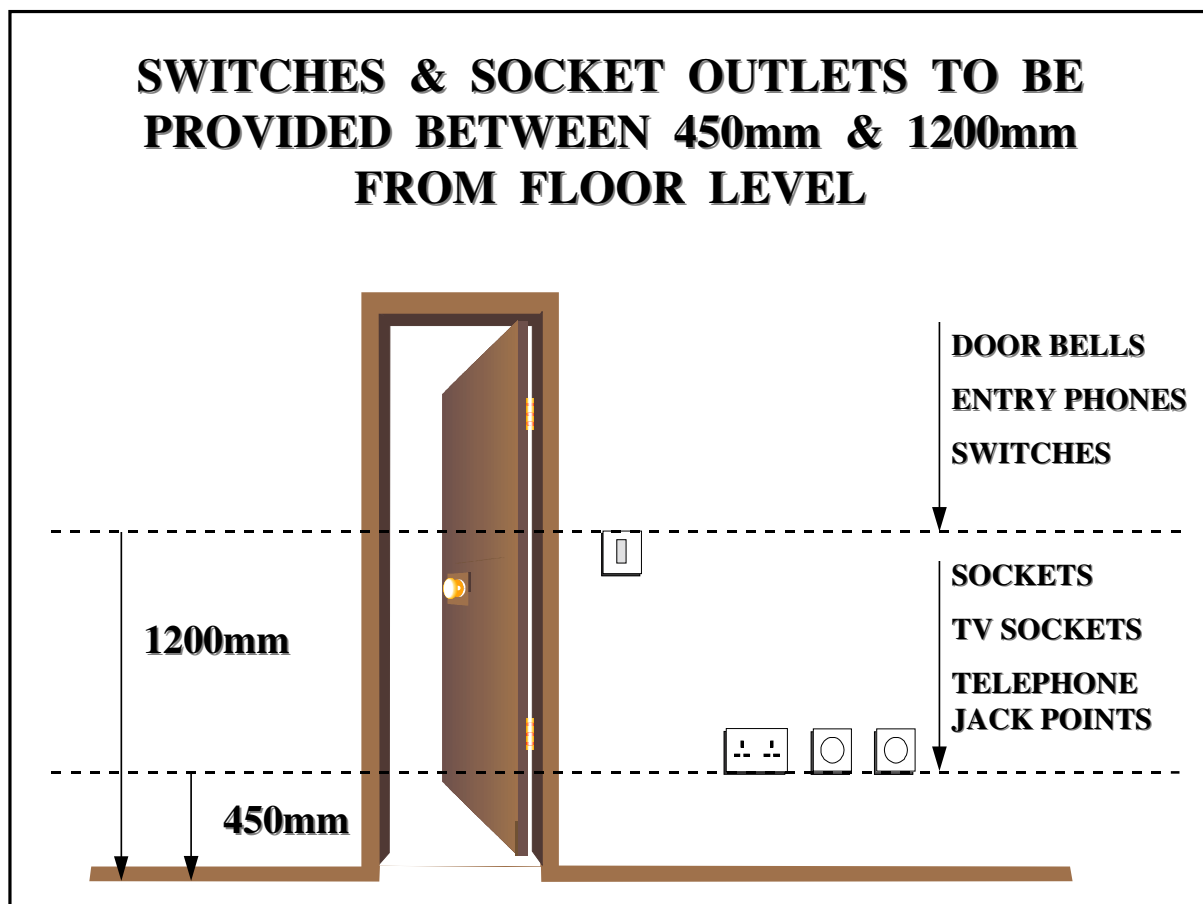



FS58945



Lincs Building Consultancy

**Tedder Hall
Manby Park
Louth
Lincolnshire
LN11 8UP**

**Tel: 08707 551696
Fax: 01507 327069
www.e-lindsey.gov.uk
E-mail: lbc@lincsbc.gov.uk**

If you would like to receive this information in another language or in another format, such as large print, Braille or on an audio tape, please contact Administration at either of the offices shown above.

Please note that these guidance notes are for advice only and may not cover all situations. It is your responsibility to ensure that they are appropriate for use in your particular circumstances.